

# DESIGN OF ISLANDING DETECTION USING PHASE-LOCKED LOOPS IN THREE-PHASE GRID-INTERFACE POWER

M. MadhuSudhan Reddy<sup>1</sup>, E.Arunakumari<sup>2</sup>

<sup>1</sup>Assistant professor, Dr.K.V.Subbareddy college of Institute &Technology,Kurnool,

<sup>2</sup>M.Tech student, Dr.K.V.Subbareddy college of Institute &Technology,Kurnool,  
Andhra Pradesh, India

**Abstract-** Phase locked loop and synchronization techniques are one of the most important issues for operating grid-interfaced converters in practical applications, which involve Distributed Power Generation Systems, Flexible AC Transmission Systems (FACTS), and High Voltage Direct Current (HVDC) Transmission, and so on. This paper proposes a systematic PLL modeling and design approach to evaluate different frequency-based islanding detection methods. Two different types of PLL-based islanding detection solution are discussed, accounting for a majority of the existing methods. The first method is to modify the PLL to constantly move the stable equilibrium point. The second method is to modify the PLL small-signal characteristics to achieve a monotonic instability behavior under the islanded conditions. The design procedures of these methods are presented using the proposed PLL modeling approach.

**Index Terms-** Converter stability, distributed generation (DG), islanding detection, phase-locked loop (PLL).

## I. INTRODUCTION

Distributed generation for renewable energy sources is penetrating the electric power system due to the rising cost of traditional energy sources and the environmentally friendly features of renewable energy. Over 60 countries around the world have set targets for renewable energy supply [1]. The types of renewable energy include solar, wind, hydrogen, biomass, geothermal, hydropower, and biodiesel. Many of these renewable energy sources are designed to supply energy into the electric power system. Each power electronics interface should provide quality power to the electric grid for the loads. This means the harmonics should be low, the inverter should be turned off if the voltage or frequency goes out of range, and the inverter should be able to detect

when the centralized generator is no longer connected; this case is called unintentional islanding. An island may occur for many reasons;

such as, a disconnection for servicing, human error, an act of nature, or one of the circuit breakers in the power system trips as shown in Fig. 4 with distributed generation (DG). Under the island condition, the distributed resource (DR) is required to disconnect within 2 seconds according to IEEE 1547[2]-[3]. A distributed resource should disconnect from the electric grid for many reasons: to prevent the electric power grid from reconnecting with the distributed resource out of phase causing a large spike in voltage damaging the loads, a line worker could get hurt, and the utility is liable for power lines even when distributed resources use them to transmit power.

Besides the detection of abnormal grid conditions, the standard also requires that a DG unit has to detect the unintentional islanding condition and de-energize the area electric power system (EPS) within 2 s. When this condition occurs, the system voltage and frequency normally shift out of the normal range and an over or under voltage (OUV) or frequency (OUF) protection method can be directly used to detect the islanding event. However, the detection time might be longer than 2 s if the voltage or frequency shifts too slowly or does not shift at all under certain local loading conditions. Therefore, a sensitive but reliable islanding-detection algorithm has to be implemented in any DG units to ensure the fulfillment of unintentional islanding-detection requirements. In addition to detecting the grid faults, islanding-detection algorithms play another key role in ac microgrid and nanogrid systems. Through the detection of islanding event, these

methods allow the control system to precisely decide an appropriate operational mode accordingly. Many islanding-detection algorithms have been proposed in the literature. In general, the islanding detection can adopt either passive or active methods [4]–[7]. Passive methods are simple but susceptible to nondetection zones (NDZ) and incompatible to certain grid codes, such as low- or zero-voltage ride-through (LVRT or ZVRT) requirements. Active methods introduce continuous perturbations and may distort the converter’s output in the case of current perturbation. The performance of active detection methods varies from the operation conditions, and a large perturbation could lead to power quality and system instability concerns. Frequency-based islanding-detection methods are gaining popularity recently as the method itself does not violate the LVRT requirement.

Therefore, it is necessary and also our intention to investigate the inherent mechanism and the converter output frequency dynamic behaviors using a systematic approach, which can be eventually applied to multiple-inverter conditions. This paper is dedicated to the modeling and design procedures for frequency-based islanding detection.

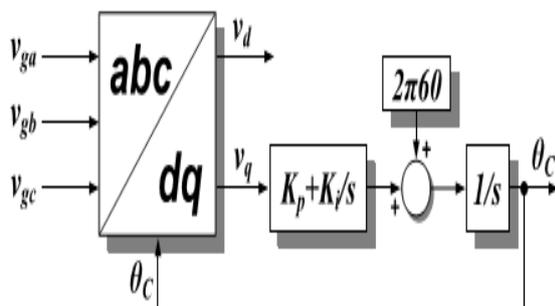


Fig. 1. Synchronous reference frame PLL linear model.

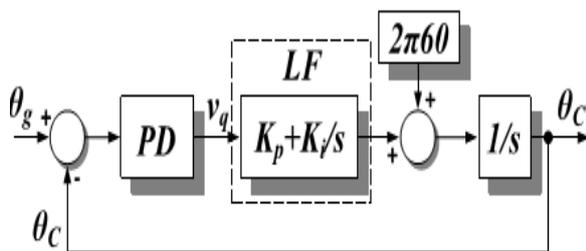


Fig. 2. Typical PLL linear model.

Two types of PLL-based islanding detection methods will be discussed and compared with the typical PLL. Figs. 1 and 2 show the typical SRF

PLL structure and its linear model. The closed-loop response is shown in (1), where the phase-detector gain  $k_{PD}$  equals the input ac voltage amplitude  $V_g$ .

## II. ISLANDING DETECTION BASED ON PLL LARGE-SIGNAL STABILITY

Fig. 3 shows a three-phase power converter system where  $Z_L$  and  $Z_g$  are the paralleled RLC local load and grid impedances, respectively. The islanding event occurs when the point-of-common-coupling (PCC) switch opens.  $I_c$  is the injection current amplitude of the inverter. The modeling of PLL frequency behavior at the islanded condition was presented in [5]. In most cases, the islanding events would be effectively detected by directly monitoring the PLL output frequency. However, for the paralleled RLC load with 60 Hz resonant frequency, the PLL output frequency will stay at the resonant frequency and the system cannot detect the islanding event. Therefore, the PLL or internal control loops are usually modified to detect islanding under such a loading condition.

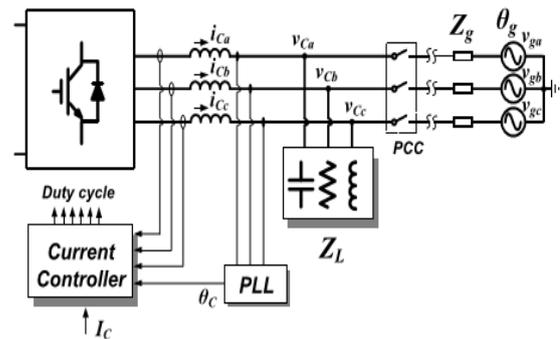


Fig. 3. Three-phase grid-interface power converter system.

The nonlinear PLL model under the islanded condition is shown in Fig. 4. Under the islanded condition, the PLL still tracks the inverter terminal voltage produced by the inverter’s current flowing to  $Z_L$ . Therefore, there is a self-synchronization loop shown in the model.

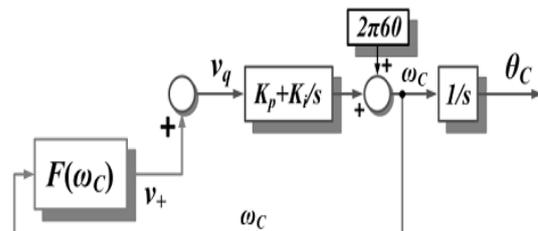


Fig. 4. SRF PLL model under the islanded condition.

This nonlinear PLL model can be linearized around the line frequency to obtain the small-signal model [5], as shown in Fig. 5.  $I_c R_L$  is considered as  $k_{PD}$ .

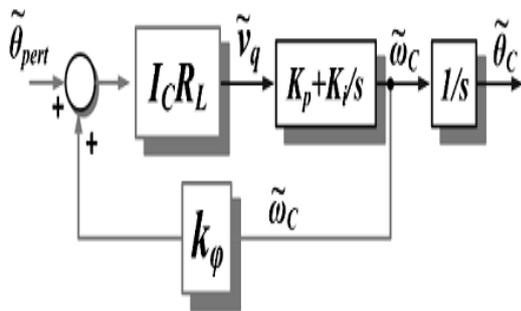


Fig.5. Linearized small-signal PLL model under islanded condition.

If the equilibrium point changes, the PLL output will automatically react to this change. Therefore, many islanding-detection methods are proposed to actively perturb the equilibrium point. Fig. 6 shows an example of PLL-based islanding detection using such a way. An additional large-signal feedback loop is introduced and multiplied by a gain  $k_{pt}$  (a 0.5 or 1 Hz small triangular signal between 0 and  $k_{max}$ ). This additional feedback loop constantly shifts the equivalent resonant frequency. Thus, the PLL output frequency will keep moving all the time.

As shown in Fig. 7, the output frequency will follow the input injection signal  $k_{pt}$ . Eventually, the average value  $\omega_{av}$  of the PLL output will stay lower than 60 Hz to ensure  $F = 0$ .

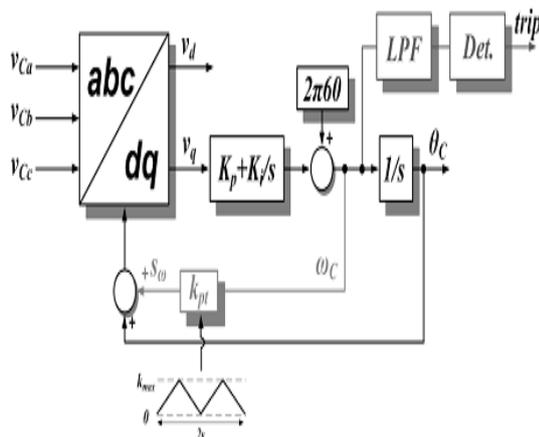


Fig. 6. Modified PLL with a large-signal feedback for islanding detection.

According to Fig. 7, the PLL output  $\omega_C$  can be directly monitored to detect the islanding condition, and a low-pass filter (LFP) is used to eliminate the high-frequency noise.

The islanding-detection protection signal is set when  $\omega_C$  is slower than the  $\omega_{th}$  or the variation range of  $\omega_C$  is beyond the threshold. The only design

parameter is  $k_{pt}$ , because it is a very low-frequency signal, much lower than the PLL bandwidth. The output of the PLL can be assumed to be at the steady state all the time.

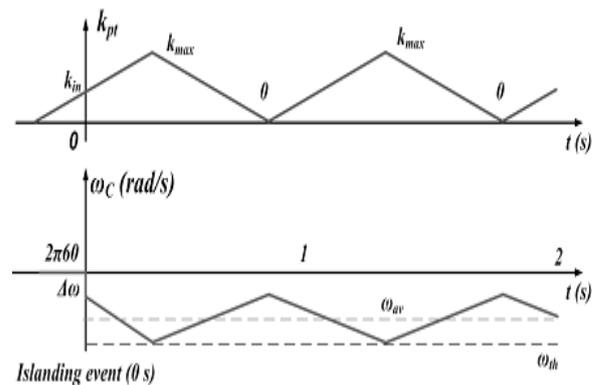


Fig. 7. First PLL output behavior when the islanding condition occurs.

The change of the grid synchronization performance owing to the additional feedback loop can be investigated by exploring the PLL model at the stiff grid-tied mode, as shown in Fig. 9.

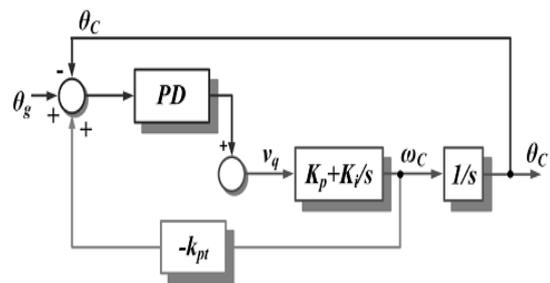


Fig. 9. Modified PLL model under the stiff grid-connected condition.

### III. ISLANDING DETECTION BASED ON PLL SMALL-SIGNAL STABILITY

The PLL cannot detect the paralleled RLC load, because the PLL is stable according to (5). Therefore, the equilibrium point itself can be modified to be unstable. With this idea, the PLL can be modified as shown in Fig. 15. An additional small-signal feedback term is introduced with a constant gain  $N$ . Then, the equivalent small-signal PLL model around the equilibrium point at the islanded condition is shown in Fig. 16

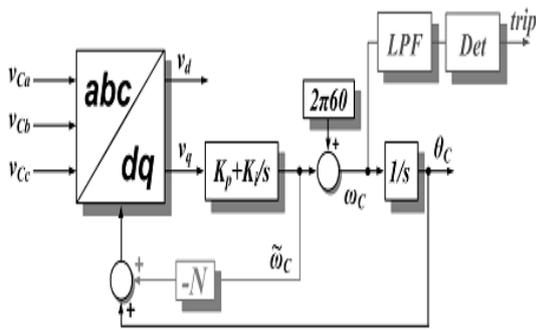


Fig. 15. Modified PLL with a small-signal feedback for islanding detection.






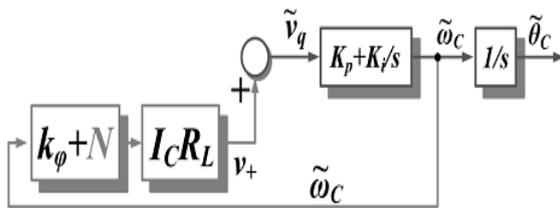




Fig. 16. Small-signal model of the modified PLL for islanding detection.

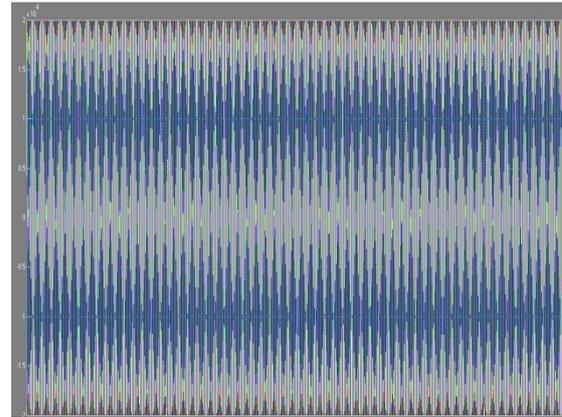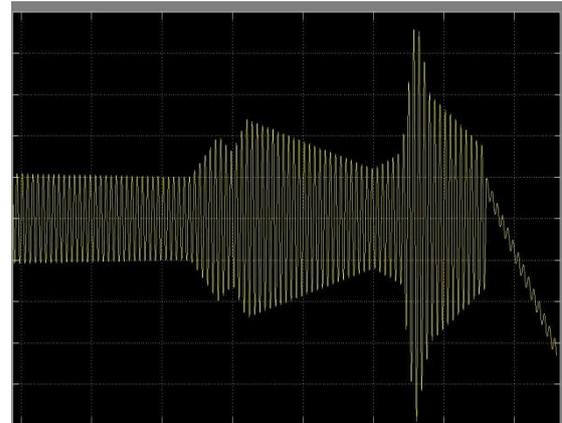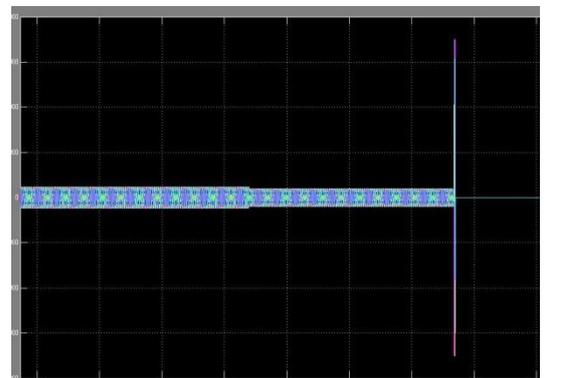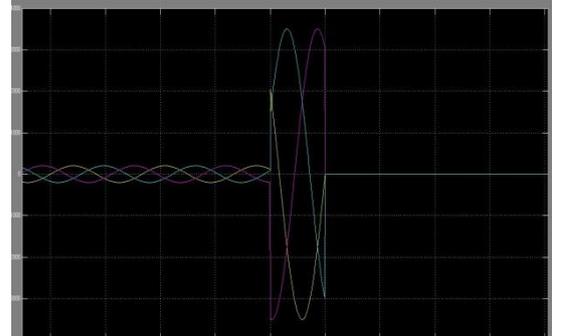

#### IV. SIMULATION RESULTS

The PLL behavior is verified in a 2.5 kW two-level three-phase PWM converter system shown below

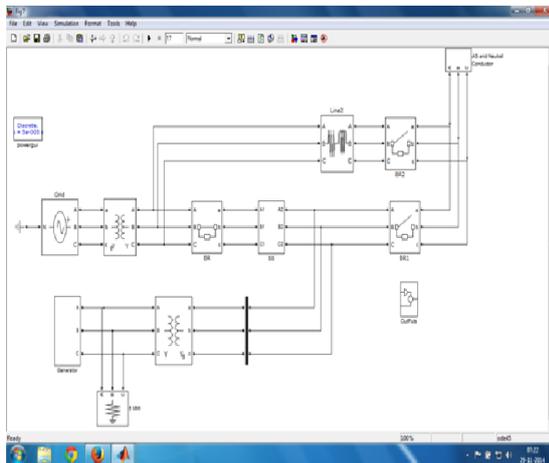

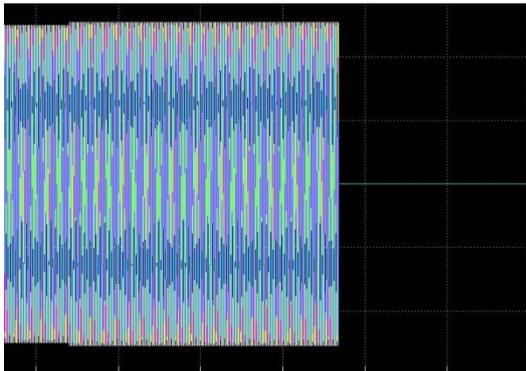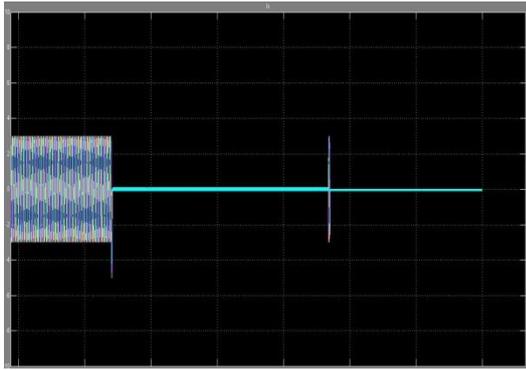

## V. CONCLUSION

The proposed PLL model can be used to analyze and explain the underlying theory for both large-signal perturbation-based and small-signal positive-feedback-based islanding-detection solutions. For the large-signal perturbation based method, the PLL keeps tracking the constantly moving equilibrium point. The change of PLL's grid synchronization performance is very limited and is robust in grid-tied conditions. The detection speed is inherently slow due to the slow PLL bandwidth, thereby requiring a low-frequency, for example, 1 Hz, signal injection. For the small-signal instability based method, the proposed small-signal PLL model shows that the additional small-signal loop gain design is determined by the local load power quality factor and its resonant frequency to ensure islanding-detection performance.

## REFERENCES

- [1] "Renewables 2007 Global Status Report," Paris:REN21 Secretariat and Washington, DC: Worldwatch Institute, REN21. 2008.
- [2] IEEE Standard for Interconnecting Distributed Resources with Electric Power System, IEEE standard 1547, 2003
- [3] L. Kumpulainen, K. Kauhaniemi, P. Verho, and O. Vähämäki, "New Requirements for System

Protection Caused by Distributed Generation," 18th International Conference on Electricity Distribution, Turin, Jun. 2005.

[4] J. M. Lee, "Islanding detection methods for microgrids," M.S. thesis, Dept. Elect. Comput. Eng., Univ. Wisconsin-Madison, Madison, WI, USA, 2011.

[5] D. Dong, "Ac-dc bus-interface bi-directional converters in renewable energy systems," Ph.D. dissertation, Dept. Elect. Comput. Eng., Virginia Polytechn. Inst. State Univ., Blacksburg, VA, USA, 2012.

[6] T. N. Thacker, "Phase-locked loops, islanding detection and microgrid operation of single-phase converter systems," Ph.D. dissertation, Dept. Elect. Comput. Eng., Virginia Polytechn. Inst. State Univ., Blacksburg, VA, USA, 2009.

[7] Z. Ye, A. Kolwalkar, Y. Zhang, P. Du, and R. Walling, "Evaluation of anti-islanding schemes based on nondetection zone concept," IEEE Trans. Power Electron., vol. 19, no. 5, pp. 1171–1176, Sep. 2004.

[8] Z. Ye, R. Walling, L. Garces, R. Zhou, L. Li, and T. Wang, "Study and development of anti-islanding control for grid-connected inverters," Dept. Energy, Nat. Renew. Energy Lab., Golden, CO, USA, Tech. Rep. NREL/SR-560–36243.

[9] T. Thacker, F. Wang, R. Burgos, and D. Boroyevich, "Implementation of control and detection algorithms for utility interfaced power conversion systems," in Proc. IEEE Appl. Power Electron. Conf. Exposit., Mar. 2006, pp. 1745–1750.

[10] Y. Jung, J. Chio, B. Yu, J. So, and G. Yu, "A novel active frequency drift method of islanding prevention for the grid-connected photovoltaic inverter," in Proc. IEEE Power Electron. Specialists Conf., Jun. 2005, pp. 1915–1921.

## BIODATA

### Author



**M. Madhusudhan Reddy** is born in 1987 in India. He is graduated from JNTUH University in 2008 and pursued Post graduation from the JNTUH University. He is currently working as a Assistant professor in the department of electrical and electronics engineering Dr. K.V.S.R institute of technology, Kurnool, Andhra Pradesh, India. He has 5 years of teaching experience. He has attended several National workshops. His main areas of research include Electrical Machines, Power Electronics & Power Systems.

### CoAuthor



**E. Arunakumari** presently pursuing her M.Tech (Electrical Power Systems) in K.V Subbareddy College of Engineering and Technology, Andhra Pradesh, India.